



SPRUNG DANCE FLOOR SYSTEM

BoFlex Dance

Engineered for studios, schools and performance spaces

28MM BUILD HEIGHT | OAK | EN 14904

Boflex Dance

Building height: 28mm
Board: 28 x 215 x 2200mm
Format: 3-strip
€€



Weight
Load



Low Floor
Elevation



Floor
Heating



Suitable for
elastic layer

Designed for
Performance

From ballet to contemporary, BoFlex Dance is crafted to meet the demands of studios, dance schools, and professional institutions, providing a reliable foundation for exceptional performances.


The Sprung BoFlex Dance System can be painted, stained or covered with vinyl sheeting and retain all its structural and performance qualities



Performance according to EN14904		Shock absorption		Deformation		Ball bounce	Rolling load
		TYPE 3: ≥ 40% ≤ 55%	TYPE 4: ≥ 55% ≤ 75%	TYPE 3: ≥ 1.8mm ≤ 3.5mm	TYPE 4: ≥ 2.3mm ≤ 5.0mm	≥ 90%	Min. 1500N
BoFlex Dance	Oak		60%		3.3mm	94%	OK



Wood species / Grading	Package overview
 Oak Unfinished FSC® MIX 70% 10167931	Pack size: 4 boards = 1.89 m² (21 kg) Pallet size: 45 packs = 85.05 m² (945 kg) Supplied: Boflex adhesive and perimeter support strips. We reserve the right to deliver up to 10 % in lengths from 70cm to 150cm.

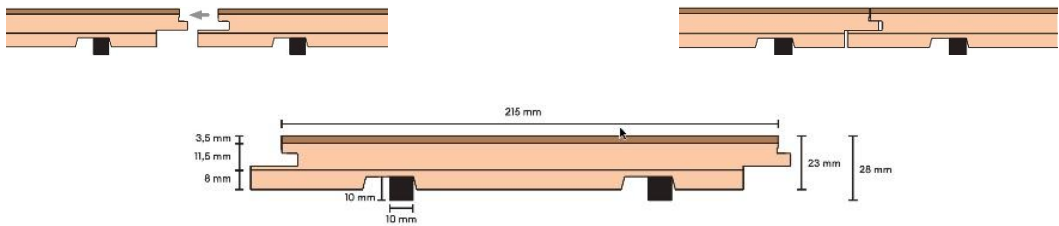

Boflex Dance Details (from the top to the edge of concrete/subfloor)		Height
BoFlex Dance • Hardwood top-layer 3.5mm • Middle layer and bottom layer • 2 strips of Evazote 50 are glued into the backside of the board	BoFlex size: 28 x 315 x 2200mm BoFlex Oak Dance board 23mm + Evazote 5mm (Board dimensions: 23 x 215 x 2200mm + Evazote dimensions: 10 x 10mm)	28mm
Perimeter strips		✓
Vapour Damp Proof Membrane (ordered separately)	BS 8204-1:2003 refers to the use of a damp proof membrane (DPM) in screeded floors, and where CP 102 applies: A single layer membrane of is required and overlaps are a minimum of 200mm, unless an alternative proprietary membrane system is used. CP 102 membranes must not be used over timber subfloors.	0.2mm
Construction height		28mm

MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it.

BoFlex Danceflooring is a product of natural materials.

All raw material used in production is sourced from forest areas that are properly managed with a high degree of regeneration. The goal is to ensure that all our raw material is certified. We invest in sustainable production and guarantee a controlled and certified supply chain.

